


Linear High Bay

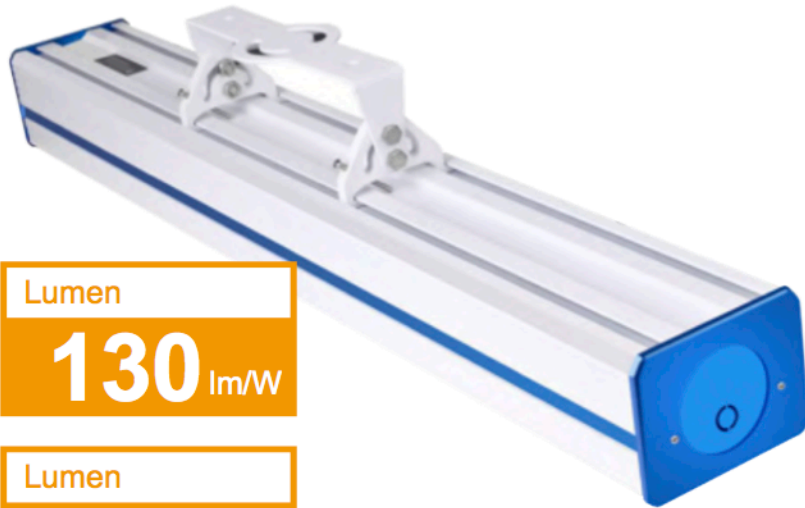

Lumen


130 lm/W

Lumen

160 lm/W

Features & Benefits:

- Isolated Longbright brand power supply
- Super bright LM80 LED 3030SMD, Ra>70
- Lumen output : 125-130lm/w
155-160lm/w
- Longbright brand isolated driver, PF>0.9, THD≤ 20 %
- AC120-277V / 347-480V, 0/1-10V dimmable
- High Quality PC Lens
- Non-flicker, protect your eyes
- 5-7 days fast delivery once confirmed
- UL cUL certifications
- Ideal replacement for traditional high bay with over 80% energy saving
- 5 Years warranty



Specifications

Technical Specification

Input Voltage: AC120-277V / 347-480V, 50Hz~60Hz

THD: $\leq 20\%$

PF: >0.90 Non-Flicker

Power Efficiency: $>90\%$

LED light source: high bright SMD3030

Color Temperature: 3000K, 4000K, 5000K

Color Rendering Index: CRI >70

Beam Angle: $60^\circ / 90^\circ / 120^\circ$


Material: PC + AL

Working Temperature: $-20^\circ\text{C} \sim +45^\circ\text{C}$

Storage Temperature: $-25^\circ\text{C} \sim +65^\circ\text{C}$

IP Grade : IP40

Working Life-span: 50,000H

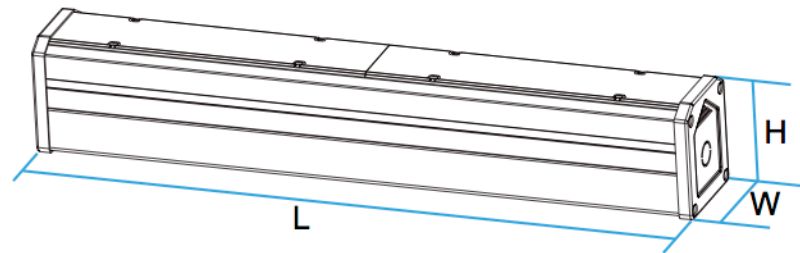

Model	SIZE(L*W*H)
LHB06-080	605*104*92mm
LHB09-150	898*104*92mm
LHB12-180	1192*104*92mm
LHB15-240	1486*104*92mm

Parameters

Parameters

Model	Watt	Input Voltage	Lumens	Size	CCT	N.W
LHB06-080	80W	AC120-277V or AC347-480V	130lm/W or 165lm/W	605*104*92mm	3000K	4.0 kg/pc
LHB09-150	150W			898*104*92mm	4000K	6.0 kg/pc
LHB12-180	180W			1192*104*92mm	5000K	8.0 kg/pc
LHB15-240	240W			1486*104*92mm	5000K	10.0 kg/pc



Optional Functions



DM(Dimming function)



SN(Sensing function)



EP(Emergency function)

Contact Us



Tel : (845) 300-9399

E-mail : billn@rocklandled.com

Web : www.rocklandled.com



Add : 425 Western Highway, Tappan NY 10983