

## LED Tri-Proof Linear Luminaire



### Specifications:

Model No.	RL-4FT-LV-32	RL-8FT-LV-64
Power:	32W	64W
Input Voltage:	AC100-277V	
Luminous Flux:	4160	8320
Efficacy:	130 lm/W	
Power Factor:	>0.9	
THD:	<10%	
CCT:	5000K	
CRI:	>80	
Working Life:	>50,000 hours	
Working Temperature:	-10°F to 105°F	
Protection Level:	Wet Location/IP65	
Product Size:	2.46" x 2.24" x 47.63"	2.46"x2.24"x95.27"
Qty/Pack	10	6
Packing Size:	6.67"x14.96"x52.36"	6.67"x9.45"x99.61"
Net Weight/Pack	30.86 lbs	33.07 lbs



### FEATURES

- ☒ IP 65, water tight and dust tight
- ☒ Suitable for wet location
- ☒ Available in 4 foot and 8 foot
- ☒ Aluminum housing for thermal management and polycarbonate lens
- ☒ 0-10V Dimmable
- ☒ Option: available with emergency backup kit/motion sensor


### Application

- ☒ Parking garages; docks; subway station; canopy; walk-in refrigerators; awning
- ☒ Indoor and Outdoor Application

## DIMENSION

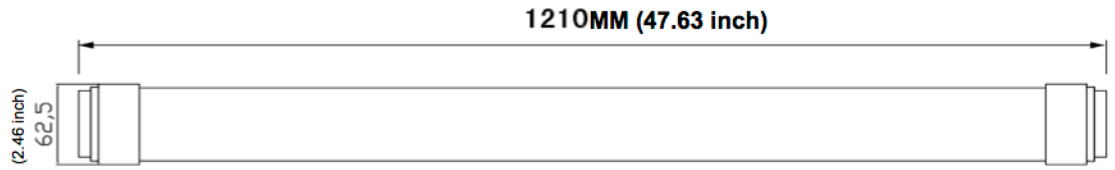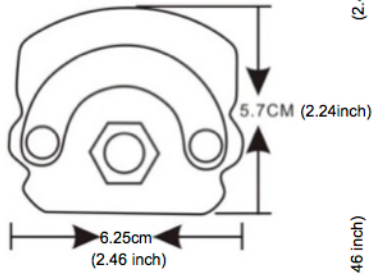

Input voltage: AC120~277V white: N , Black: L , Purple: 0~10V+ , Gray: 0~10V -

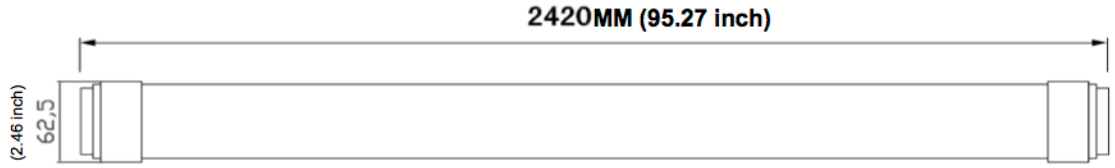


Input voltage: AC120~277V white: N , Black: L , Purple: 0~10V+ , Gray: 0~10V -

## Installation Guide

### Instruction # 1


Installation




Ceiling installation

### Instruction # 2


#### Step 1

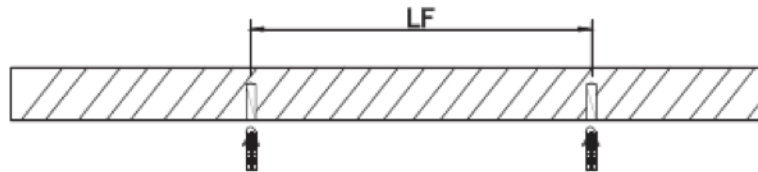

#### Step 2

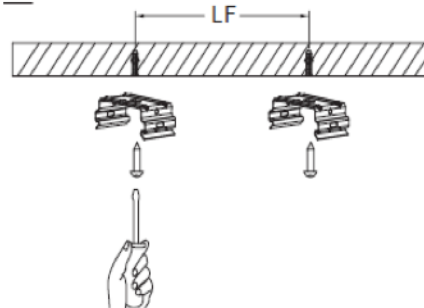

#### Step 3

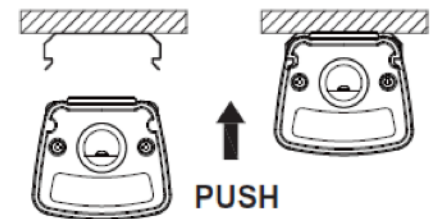

## PHOTOMETRIC REPORT

